









-  Static Spray balls
-  Tête de pulvérisation
-  Sprühkopf
-  Boquilla de limpieza de tanque
-  Sfere di lavaggio



## 360° Pattern

**STANDARD SIZE/\*** At temperature 50°C /122 °F

CODE	Connection	DIN11850 / DIN11866			Operating Dia	Flow rate(m <sup>3</sup> /h)		Ball dia	H
		DIN	ISO1127	Inch		Meters(m)	1Bar		
7008 001	Slip on	12/13	13.5	1/2"	0.8-1.5	2.8	-	28	45
7008 002	Slip on	18/19	17.2/21.3	3/4"	1.0-2.0	5.1	-	28	45
7008 003	G BSP G1/4"	13	13.5	1/2"	0.8-1.5	2.4	-	28	45
7008 004	G BSP G 1/2"	19	17.2/21.3	3/4"	1.0-2.0	4.7	-	28	45






The welded type is similar to slip on, Only 316L is available. Hole Ø 1.25mm


CODE	Connection	DIN11850 / DIN11866			Operating Dia	Flow rate(m <sup>3</sup> /h)		Ball dia	H
		DIN	ISO1127	Inch		Meters(m)	1Bar		
7008 005	Slip on	28/29	26.9	1"	2.0-3.0	9.8	15.3	64	85
7008 006	Slip on	40/41	33.7	1.5"	2.5-3.5	12.8	20.8	64	85
7008 007	G BSP G 3/4"	29	26.9	1"	2.0-3.0	9.4	14.7	64	85
7008 008	G BSP G 1"	41	33.7	1.5"	2.5-3.5	12.3	20.2	64	85

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm

CODE	Connection	DIN11850 / DIN11866			Operating Dia	Flow rate(m <sup>3</sup> /h)		Ball dia	H
		DIN	ISO1127	Inch		Meters(m)	1Bar		
7008 009	Slip on	52/53	-	2"	3.5-5.0	28.4	47.00	93	115
7008 010	Slip on	52/53	-	2"	4.0-6.0	35.6	58.90	93	115
7008 011	G BSP G 1 1/2"	53	-	2"	3.5-5.0	27.4	45.37	93	115
7008 012	G BSP G 1 1/2"	53	-	2"	4.0-6.0	34.5	57.13	93	115

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm, Hole Ø2.40m

-  Static Spray balls
-  Tête de pulvérisation
-  Sprühkopf
-  Boquilla de limpieza de tanque
-  Sfere di lavaggio

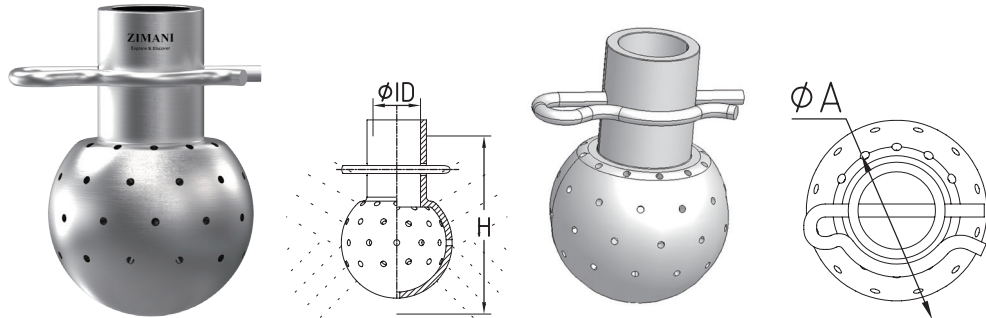

## 270° Upward Spray

**STANDARD SIZE/\*** At temperature 50°C /122 °F

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m³/h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 013	Slip on	12/13	13.5	1/2"	0.8-1.5	2.6	-	28	45
7008 014	Slip on	18/19	17.2/21.3	3/4"	1.0-2.0	4.6	-	28	45
7008 015	G BSP G 1/4"	13	13.5	1/2"	0.8-1.5	2.2	-	28	45
7008 016	G BSP G 1/2"	19	17.2/21.3	3/4"	1.0-2.0	4.3	-	28	45






The welded type is similar to slip on, Only 316L is available. Hole Ø 1.25mm




CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m³/h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 017	Slip on	28/29	26.9	1"	2.0-3.0	8.9	13.9	64	85
7008 018	Slip on	40/41	33.7	1.5"	2.5-3.5	11.6	18.9	64	85
7008 019	G BSP G 3/4"	29	26.9	1"	2.0-3.0	8.5	13.3	64	85
7008 020	G BSP G 1"	41	33.7	1.5"	2.5-3.5	11.2	18.3	64	85

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m³/h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 021	Slip on	52/53	-	2"	3.5-5.0	25.8	42.7	93	115
7008 022	Slip on	52/53	-	2"	4.0-6.0	32.3	53.5	93	115
7008 023	G BSP G 1 1/2"	53	-	2"	3.5-5.0	24.9	41.2	93	115
7008 024	G BSP G 1 1/2"	53	-	2"	4.0-6.0	31.3	51.9	93	115

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm, Hole Ø2.40m

-  Static Spray balls
-  Tête de pulvérisation
-  Sprühkopf
-  Boquilla de limpieza de tanque
-  Sfere di lavaggio



## 180° Upward Spray

**STANDARD SIZE/\*** At temperature 50°C /122 °F

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m <sup>3</sup> /h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 025	Slip on	12/13	13.5	1/2"	0.8-1.5	1.43	-	28	45
7008 026	Slip on	18/19	17.2/21.3	3/4"	1.0-2.0	2.6	-	28	45
7008 027	G BSP G 1/4"	13	13.5	1/2"	0.8-1.5	1.2	-	28	45
7008 028	G BSP G 1/2"	19	17.2/21.3	3/4"	1.0-2.0	2.4	-	28	45






The welded type is similar to slip on, Only 316L is available. Hole Ø 1.25mm




CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m <sup>3</sup> /h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 029	Slip on	28/29	26.9	1"	2.0-3.0	7.8	12.4	64	85
7008 030	Slip on	40/41	33.7	1.5"	2.5-3.5	8.3	14.1	64	85
7008 031	G BSP G 3/4"	29	26.9	1"	2.0-3.0	7.5	11.6	64	85
7008 032	G BSP G 1"	41	33.7	1.5"	2.5-3.5	7.9	13.7	64	85

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m <sup>3</sup> /h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 033	Slip on	52/53	-	2"	3.5-5.0	19.3	30.6	93	115
7008 034	Slip on	52/53	-	2"	4.0-6.0	22.5	37.5	93	115
7008 035	G BSP G 1 1/2"	53	-	2"	3.5-5.0	18.6	29.6	93	115
7008 036	G BSP G 1 1/2"	53	-	2"	4.0-6.0	21.9	36.4	93	115

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm, Hole Ø2.40m

-  Static Spray balls
-  Tête de pulvérisation
-  Sprühkopf
-  Boquilla de limpieza de tanque
-  Sfere di lavaggio



## 180° Downward Spray

**STANDARD SIZE/\*** At temperature 50°C /122 °F

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m <sup>3</sup> /h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 037	Slip on	12/13	13.5	1/2"	0.8-1.5	1.7	-	28	45
7008 038	Slip on	18/19	17.2/21.3	3/4"	1.0-2.0	3.1	-	28	45
7008 039	G BSP G 1/4"	13	13.5	1/2"	0.8-1.5	1.5	-	28	45
7008 040	G BSP G 1/2"	19	17.2/21.3	3/4"	1.0-2.0	2.8	-	28	45

The welded type is similar to slip on, Only 316L is available. Hole Ø 1.25mm

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m <sup>3</sup> /h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 041	Slip on	28/29	26.9	1"	2.0-3.0	6.9	10.9	64	85
7008 042	Slip on	40/41	33.7	1.5"	2.5-3.5	7.8	12.8	64	85
7008 043	G BSP G 3/4"	29	26.9	1"	2.0-3.0	6.6	10.5	64	85
7008 044	G BSP G 1"	41	33.7	1.5"	2.5-3.5	7.5	12.4	64	85

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm

CODE	Connection	DIN11850 / DIN11866			Operating Dia Meters(m)	Flow rate(m <sup>3</sup> /h)		Ball dia Inch/mm	H mm
		DIN	ISO1127	Inch		1Bar	2.0bar		
7008 045	Slip on	52/53	-	2"	3.5-5.0	17.1	28.9	93	115
7008 046	Slip on	52/53	-	2"	4.0-6.0	22.4	37.1	93	115
7008 047	G BSP G 1 1/2"	53	-	2"	3.5-5.0	16.6	27.9	93	115
7008 048	G BSP G 1 1/2"	53	-	2"	4.0-6.0	21.7	35.6	93	115

The welded type is similar to slip on, Only 316L is available. Hole Ø 2.00mm, Hole Ø2.40m