



Tubular level indicator PN 10

Level indicator with threaded connection

Type 461



APPLICATION:

For liquid level indication on vessels, boilers, tanks and silos. Designed for up to 10 bar operating pressure with threaded or flanged connection. Including additional single-sided outlet for complete emptying. Optional impact protection available with or without indicator scale.

INSTALLATION NOTE:

When installing, make sure that the sockets are exactly aligned in order to avoid tension in the glass tube! Do not use the indicator as a load-bearing component.

**Threaded connection
($\Delta P \leq 10$ bar)**

Operating conditions:

Temperature: (depending on glass and gasket)	80 °C ¹	
Pressure:	≤ 10	Bar
¹ higher on request		

IMPACT PROTECTION:


An impact protection can be used against unintentional damage to the glass tube. This impact protection is made of Plexiglas specially manufactured for ACI. In order to minimize bending stresses, an impact protection may also be used.

Materials:

Socket:	Brass
Glass tube:	borosilicate glass
Gasket:	NBR / PTFE
Impact protection:	Plexiglas tube with or without display scale
Special materials on request	




THREADED CONNECTION

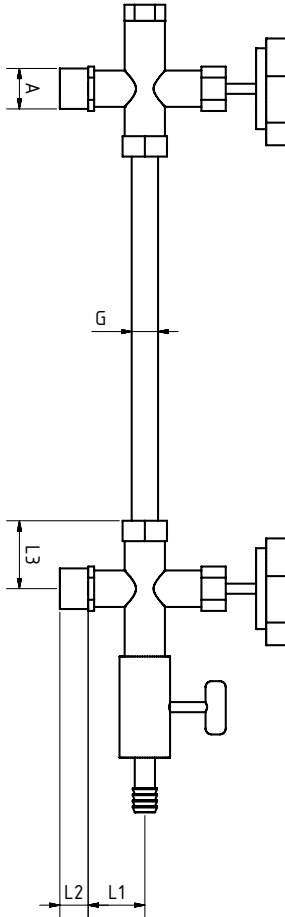

INTERMEDIATE SUPPORT

OVERALL LENGTH:

For overall lengths exceeding 1500mm, additional intermediate supports are required! For such cases we point out to its necessity. The dimensions of the intermediate supports can be found in the drawings on the next page.

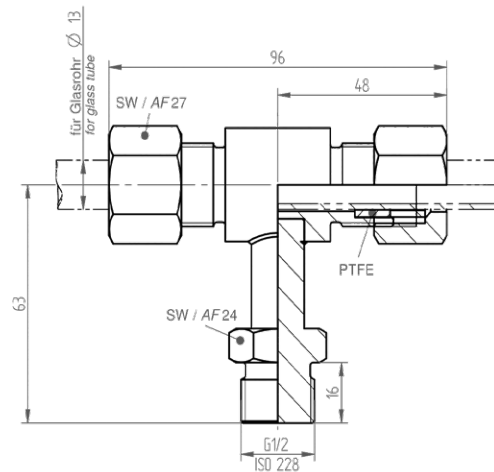

A	G 1/2"
L1	47
L2	16
L3	44
G	13
PS max (bar)	10



Tubular level indicator PN 10

Level indicator with threaded connection

Type 461

PRODUCTCODE:

Group	TYPE	Connection	Nominal diameter	centre-to-centre distance	Impact protection / Indicator scale
11	461	1: Thread	1: G 1/2"	On request	1: with impact protection 2: without impact protection 3: with impact protection and indicator scale

INFO: Unless otherwise stated, the factory standard highlighted is supplied.

SPECIAL DESIGNS/OPTIONS:

- a) Impact protection
- b) Impact protection with indicator scale
- c) Further options on request

EXAMPLE:

11-461-1-1-1000-1 equals the product code:
ACI Type 461
threaded version
G 1/2"
1000 mm centre-to-centre distance
with impact protection

RECOMMENDATION:

To minimize bending stresses, an impact protection is recommended!

Contact in Germany:
ACI Industriearmaturen GmbH
Tel. +49 (0) 2403 748 850
info@aci24.com • www.aci24.com

Contact in Poland:
Continental Trade Sp. z o.o.
office@continentaltrade.com.pl
http://continentaltrade.com.pl

20190909

Technical changes and errors reserved!