




ACI
INDUSTRIEARMATUREN

Circular sight glass fitting type 321 DIN 28121 PN 10/25 For flange mounting

Type 321

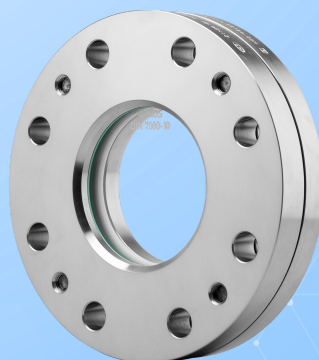

Execution in accordance with DIN 28121

USAGE

Round sight glass fittings are used for observing and illuminating the interior of closed containers (boilers, tanks, silos, etc.). Type 321 sight glass fittings are round flange mounts for screwing onto flanges, completed with a sight glass plate that is inserted and securely screwed between the gaskets. The sealing is done using a flexible gasket, with the force shunt ensuring the necessary compression.

Operating conditions

Temperature: (depending on glass and gasket)	$\leq 150\text{ }^{\circ}\text{C}$	Soda-lime glass DIN 8902 or similar
	$\leq 200\text{ }^{\circ}\text{C}^1$	Borosilicate glass DIN 7080 or similar
Pressure:	$\leq 10/25\text{ barg}$	

1) Limited by the gasket,
for higher temperatures see type 323


MATERIALS

Base flange:	1.4571; 1.4404; 1.4541; 1.4306
Glass:	Borosilicate glass (DIN 7080 or similar) Soda-lime glass (DIN 8902 or similar)
Gasket:	PTFE coated corrugated ring gasket
Screws:	A4-70
Special materials available upon request	

INSTALLATION NOTE

Suitable seals should be used for the sealing surfaces. The screw material should be equivalent to or of higher quality than the sight glass flanges. Generally, screws that are appropriate according to applicable standards should be used. If possible, the screw thread, as well as the screw head, should be provided with screw lubrication.

DRAWING

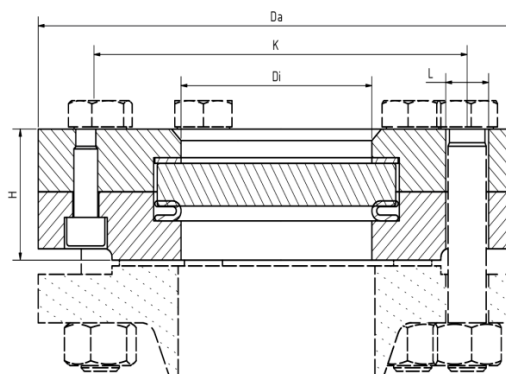



DN	40	50	80	100	125	150	200
Di [mm] PN 10	48	65	80	100	125	125	150
H [mm] PN 10	36	38	46	46	54	54	54
Da [mm] PN 10	150	165	200	220	250	285	340
L [mm] PN 10	18	18	18	18	18	22	22
K [mm] PN 10	110	125	160	180	210	240	295
Weight [kg] PN 10	3,8	4,6	8,2	9,3	13,8	19,5	28,7
H [mm] PN 25	38	41	50	59	66	66	66
Da [mm] PN 25	150	165	200	235	270	300	360
L [mm] PN 25	18	18	18	22	26	26	26
K [mm] PN 25	110	125	160	190	220	250	310
Weight [kg] PN 25	4	5	8,9	14	20	26,9	39,3



PRODUCT CODE

Example for Explaining the Code Composition

11 - 321 - 1 - 100 - 1 - 1 - 1 - 0

GROUP	TYPE	PN	NOMINAL SIZE	BASE FLANGE ¹	GLASS	GASKET	VARIANT
11	321	1) 10	DN 40	1) 1.4571	1) Borosilicate glass according to DIN 7080 or similar	1) PTFE	0) Standard
		2) 25	DN 50	2) 1.4541	2) Soda-lime glass according to DIN 8902 or similar		
			DN 80	3) 1.4404			
			DN 100		4) Borosilicate glass ² + PTFE wiper SGW		
			DN 125		5) Borosilicate glass ² + silicone wiper SGW		
			DN 150		6) Soda-lime glass ³ + PTFE wiper SGW		
			DN 200		7) Soda-lime glass ³ + silicone wiper SGW		

1) Cover flange according to quote / order confirmation

2) Similar to DIN 7080

3) Similar to DIN 8902



Unless otherwise specified, the highlighted factory standard will be delivered.

EXAMPLE

The product code **11-321-1-100-1-1-1-0** corresponds to the standard version:

ACI Type 321

DN 100

PN 10

Base flange made of 1.4571


Cover flange made of 1.4571

Borosilicate glass DIN 7080

PTFE encased corrugated ring gasket

STRUCTURE

1. Cover flange
2. Glass cushion
3. Sight glass
4. PTFE coated encased corrugated ring gasket
5. Base flange
6. Screws

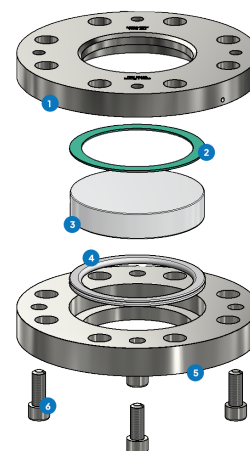

For aggressive media, FEP or Halar® coated sight glasses can be used. For steam, mica discs should be used to protect the glasses.



Circular sight glass fitting type 321 DIN 28121 PN 10/25 For flange mounting

Type 321

QUICK OVERVIEW



max. 25 barg



heat resistant up to 200
°C



for liquid media



for gaseous media



Nominal sizes
DN 40 - 200



custom designs possible



accessories available

OPERATING CONDITIONS

Operating conditions depend on the choice of glass and gaskets:

		SIGHT GLASS		GASKETS
		Soda-lime glass (DIN 8902 or similar)	Borosilicate glass (DIN 7080 or similar)	PTFE max. 200 °C
TEMPERATURE	up to 200 °C	✗	✓	✓
	up to 10/25 barg	✓	✓	✓

✓ suitable ✗ unsuitable



ACI
INDUSTRIEARMATUREN

Circular sight glass fitting type 321 DIN 28121 PN 10/25 For flange mounting


Type 321

OPTIONAL ACCESSORIES



Spraying device SV2

- > For intermediate flange mounting



Round mica discs

- > up to 320 °C with Borosilicate glass DIN 7080



Sight glass wiper

- > with PTFE, silicone, EPDM or FKM wipers



LED lights

- > for Ex and non-Ex areas



FEP protective screen / coating

- > for high pH values



The pressure-temperature limits according to DIN EN 1092-1 apply!

ACI Industriearmaturen GmbH

✉ info@aci24.com

🌐 www.aci24.com

📍 Königskamp 19 · 52428 Jülich · Germany

☎ +49 (0) 2461 91634 00

☎ +49 (0) 2461 91634 44

Continental Trade Sp. z o.o.

✉ biuro@continentaltrade.com.pl

🌐 www.continentaltrade.com.pl

📍 Stara 23 · 05-270 Nadma · Poland

☎ +48 22 670 11 81

